

## MyCafe® AP AutoPOD® Auto Eject Pod Brewer



### My Cafe AP

Dimensions: 15.8" H x 9.7" W x 15.2" D  
(40.1cm H x 24.6cm W x 38.6cm D)

### Features

#### Commercial-grade, single-cup system with the convenience of automatic pod disposal

- New single tank pump design provides consistent brew quality on varying water pressures.
- Works with Shurflo or Flojet pump system.
- Jet-action sprayhead design allows for proper extraction of all flavoring materials and aromatics.
- Brews up to 16 ounces (473mL) of coffee or tea in less than a minute.
- Control extraction utilizing pulse-brew technology with BrewMETER®.
- Eliminates waste by brewing one fresh cup at a time from a wide variety of coffee and tea pods.
- Automatically disposes of spent pods after each brew.
- Removable pod bin holds up to 25 spent pods.
- Pod bin and drip tray can be modified for under-counter disposal of pods.
- Digital display in English/French for easy programming, operation and control.
- Push and hold hot water button provides up to 10 ounces (296mL) of hot water for cappuccino, cocoa and soups.
- Integrated cup booster allows for 5" or 8" (12.7cm or 20.3cm) cup clearance.
- Energy-saver mode reduces tank temperature during idle periods.
- Recipe labels provided allow for customization of beverages dispensed.
- Ready to use out of the box.

For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

### Related Products

#### Brew Station

Product No.: 39501.0001  
(brewer and accessories  
not included)



#### Rack Assembly

Product No.: 39502.0001  
(pods not included)



My Cafe AP AutoPOD  
with BUNN Wrap  
Product No.: 42300.6001



**Model**

**Agency Listing**

My Cafe AP

# Dimensions & Specifications




Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cu. Ft.	Shipping Weight	Cord Attached
AutoPOD	42300.6000	120	12.1	1450	1450	16 oz/minute (473 ml/minute)	2.34 (.07 m <sup>3</sup> )	30 lbs (14.1kg)	Yes*
AutoPOD	42300.6001	120	12.1	1450	1450	16 oz/minute (473 ml/minute)	2.34 (.07 m <sup>3</sup> )	30 lbs (14.1kg)	Yes*

\*Power cord (NEMA 5-15P) 15 Amp-120V machine only.

**Brewing capacity:** based upon incoming water temp of 60°F/15°C (140°F/60°C rise).

Electrical: Model requires 2-wires plus ground service rated 120V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" OD male flare fitting.

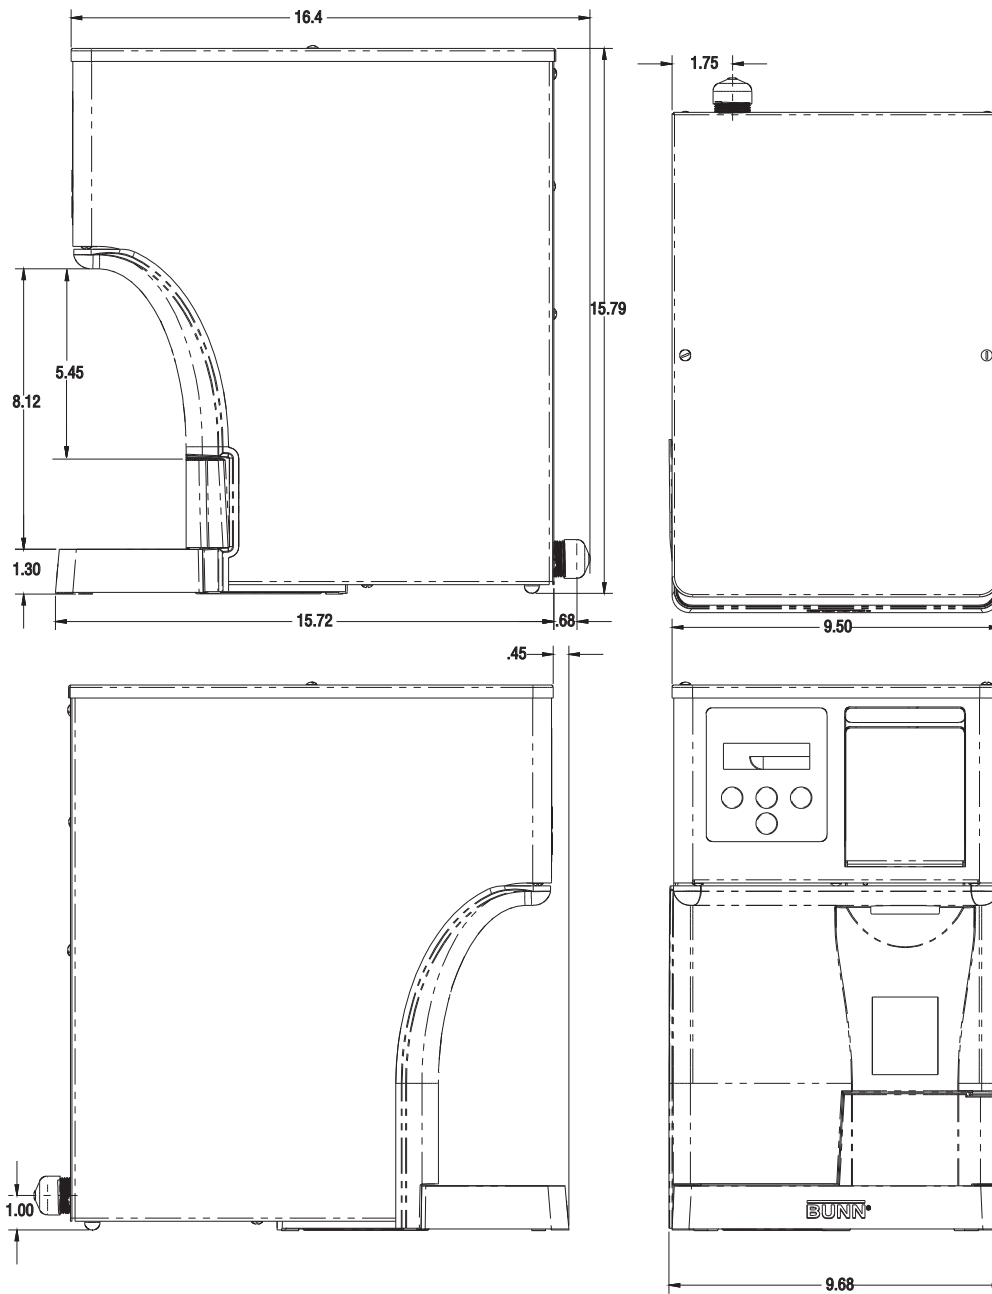

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.  
8/11© Bunn-O-Matic Corporation